



# URW-295

(2.9t x 1.4m)

UNIC Mini Crane

[www.hird.co.uk](http://www.hird.co.uk)

With remote control operation & safe load indicator, the URW295 mini crane will lift up to 2.9t and is ideal for confined and restricted areas.



## 2.9t x 1.4m

### Technical Specification

Max. lifting capacity	2.9t x 1.4m
Lifting height	8.80m
Max. working radius	8.41m
Boom length	2.53 - 8.65m
Power source	Diesel, Petrol, LPG Dual or Electric Dual
Weight	1,850kg 1,950kg with electric option, 1,920kg with diesel option 2,090kg with diesel and electric dual option



CPCS - A66 Compact Crane A



### Features include

- Radio remote control operation
- Configurable outriggers
- Automatic hook stow
- Overwinding alarm
- Will pass through single doorway
- Optional searcher hook and fly jib




Northern  
01482 227333

Central  
01302 341659


Western  
01384 900388

Southern  
0203 174 0658


## Working Envelope

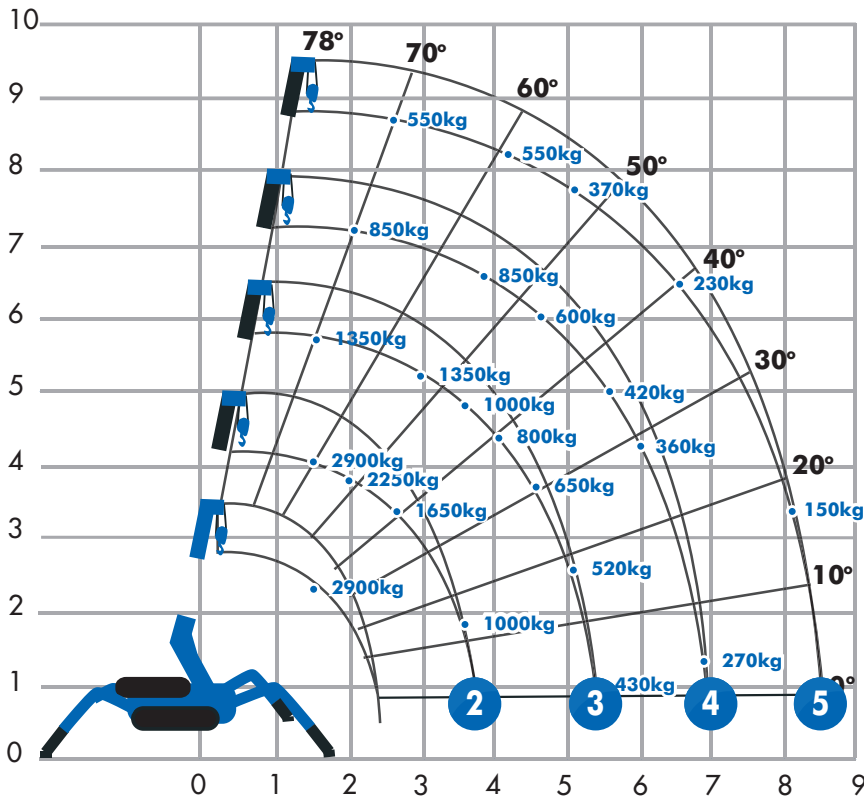



## Outrigger Positions

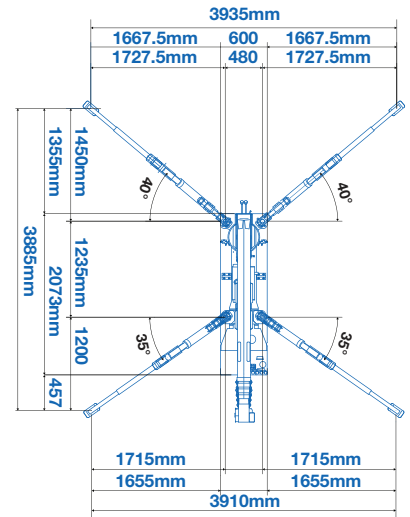

## Max. Reach Below Ground Level

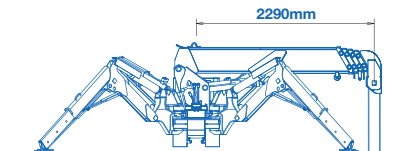

## Dimensions (mm)

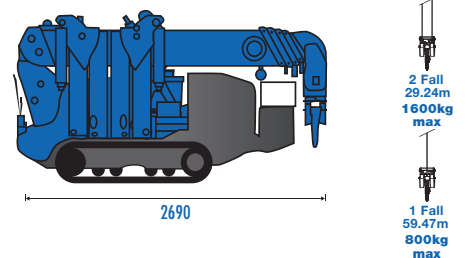

## Rated Loads

**2** Second stage extended 2.53 - 4.075m boom length

Working radius	m up to	1.0	1.4	1.5	1.8	2.0	2.5	3.0	3.5	3.835	
Outrigger	Max-extended	kg	2,900	2,900	2,650	2,250	2,050	1,650	1,300	1,000	900
	Min-extended	kg	2,000	2,000	2,000	1,450	1,100	650	490	350	250

**3** Third stage extended 4.075 - 5.61m boom length

Working radius	m up to	2.2	2.5	2.9	3.0	3.5	4.0	4.5	5.0	5.37	
Outrigger	Max-extended	kg	1,350	1,350	1,350	1,250	1,000	800	650	520	430
	Min-extended	kg	800	650	530	500	380	280	220	160	120

**4** Fourth stage extended 5.61 - 7.13m boom length

Working radius	m up to	3.3	3.8	4.0	4.5	5.0	5.5	6.0	6.5	6.89	
Outrigger	Max-extended	kg	850	850	750	600	500	420	360	320	270
	Min-extended	kg	420	340	300	250	190	140	100	80	60

**5** Fifth stage extended 7.13 - 8.65m boom length

Working radius	m up to	3.8	4.1	4.5	5.0	5.5	6.0	6.5	7.0	8.0	8.41	
Outrigger	Max-extended	kg	550	550	450	370	310	270	230	200	150	130
	Min-extended	kg	350	290	250	200	160	130	100	70	40	30

Product specifications are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only.