Oktopus GL-RN-F 600 / 800

Dual Circuit Vacuum Lifter

The Wirth Oktopus GL-RN-F 600 / 800 has a 'short' lift arm and extension arms which increases capacity up to 800kg. A large capacity makes this suitable for substantial glass or material panels.

- Dual independent vacuum circuits with two vacuum reserve tanks and two non-return valves
- Vacuum gauge for each circuit
- Audio-visual low vacuum alert
- On-board maintenance-free vacuum pump
- 12v rechargeable battery with integral 110v or 240v charger and battery energy gauge
- Extension arms included for lifting larger sized elements





Wired remote control

800kg



360° rotation





90° til


Technical Specification

Max. lifting capacity	800kg	600kg	400kg
Weight of lifter	80kg	70kg	60kg
Number of suction cups	8	6	4
Suction cup dimension	330mm Ø		
Structural depth	220mm		
Power source incl. charger	Battery (110v on-board charger)		

Dimensions (mm)

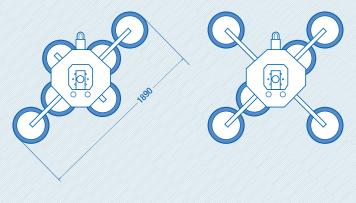







RTITB - accredited vacuum course



Product specifications are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only.