

The Wienold MFC 750 Ks – known as the Shorty – is a compact variant of the MFC 750 K mini floor crane available for hire from Hird.

- Ideal for operation in most constrained spaces, i.e. from roof edges
- Max boom length 120mm
- SWL at max boom length 155kg
- Easy to assemble and break down
- Lockable wheels




500kg

Technical Specification

Lifting height	Below the hook	3.05m
Transport position	Height x Length x Width ²	1.00-1.92m x 1.20m x 0.65m
Working position	Height x Length ¹ x Width ²	1.92m x 1.20m x 0.65m
Loading height min.		0.85m
Boom extension	Each position	120mm
Boom length	Max.	1.20m
Max. lifting capacity	Distance from front wheel : hook = 0.52m	500kg
Weight of chassis	incl. boom ³	160kg
Weight of counterweights	(28 x 16kg) incl. 2 Boxes	490kg

Rated load diagram

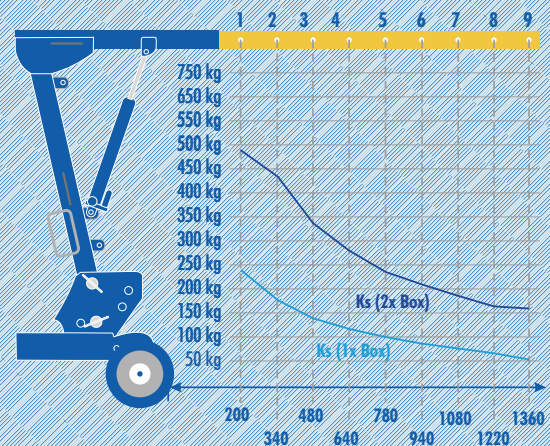

Please Note: Different SWLs apply when performing negative lift duties with any form of winch / hoist



LEEA - Counterbalance floor crane



Product specifications are subject to change without notice or obligation.
The photographs and/or drawings in this document are for illustrative purposes only.