



Est. 1983
Celebrating **40 Years**

www.hird.co.uk

MC815

(8.0t x 2.4m)

Maeda Mini Crane



The Maeda MC815 is the largest Maeda mini crane with a huge 8 tonne lift capacity.

Offering pick and carry capacities of up to 1000kg and packed with the latest technology for safe and efficient lifting.

8.0t x 2.4m

Technical Specification

Max. lifting capacity	8.0t x 2.4m
Lifting height	19.6m x 2,390kg
Max. working radius	18.8m x 340kg
Boom length	3.695 - 12.485m
Power source	Diesel or Electric
Weight	Diesel - MC815 C 9,460kg Electric - MC815 CRME 9,700kg

Features include

- Multi-function touchscreen monitor
- 1t pick & carry duty
- Auto levelling / auto stow via remote
- Environmentally friendly EU compliant engine
- Optional 1.5t SWL hydraulic fly jib



CPCS - A66 Compact Crane A




Northern
01482 227333


Central
01302 341659

Southern
0203 174 0658



Working Envelope

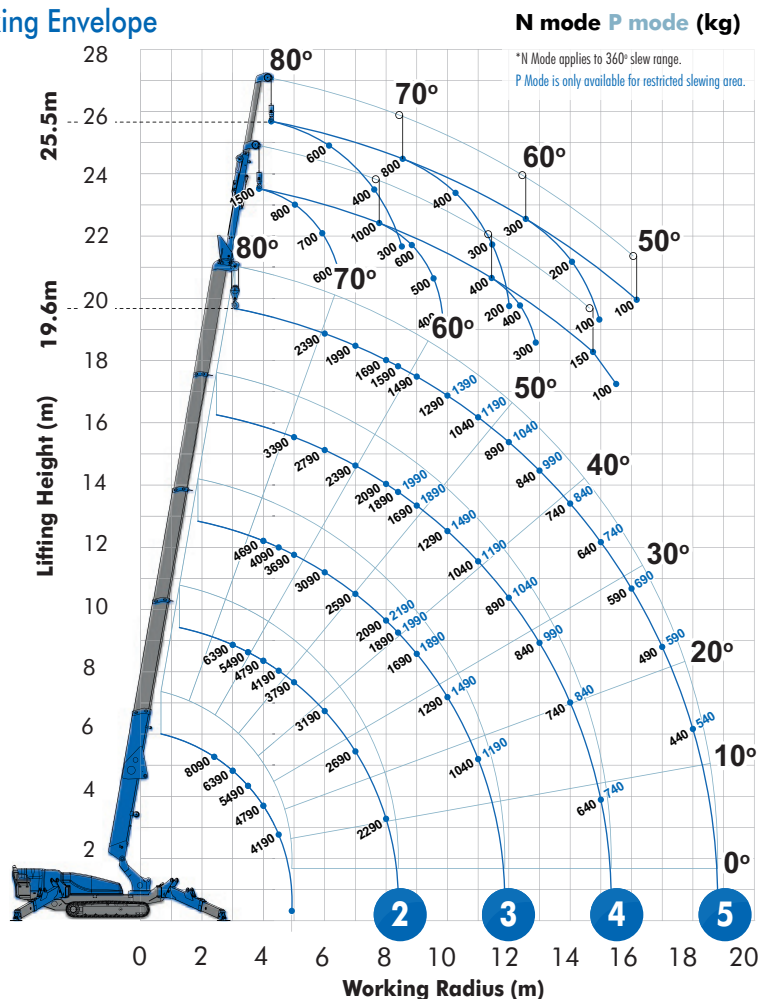

Outrigger Positions

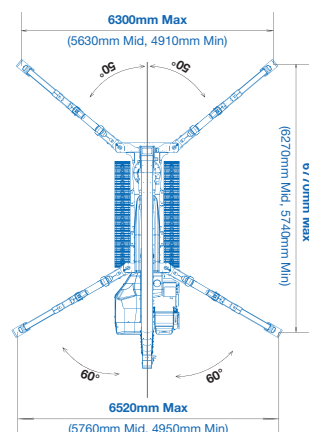

Dimensions (mm)

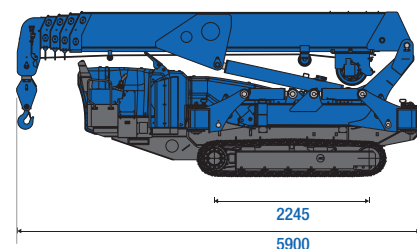

Rated Loads

2

Second stage extended 4.92 - 8.39m boom length

Working radius	m up to	2.4	2.5	3.0	3.5	4.0	4.5	4.92	5.0	6.0	7.0	8.0	8.39
Outrigger	N mode*	kg	6,390	6,390	6,390	5,490	4,790	4,190	3,790	3,790	3,190	2,690	2,090
Max-extended	P mode*	kg	6,390	6,390	6,390	5,490	4,790	4,190	3,790	3,790	3,190	2,690	2,090

3

Third stage extended 8.39 - 11.86m boom length

Working radius	m up to	2.4	2.5	3.0	3.5	4.0	4.5	4.92	5.0	6.0	7.0	8.0	8.39	9.0	10.0	11.0	11.86
Outrigger	N mode*	kg	4,690	4,690	4,690	4,690	4,690	4,090	3,690	3,690	3,090	2,590	2,090	1,890	1,690	1,290	890
Max-extended	P mode*	kg	4,690	4,690	4,690	4,690	4,690	4,090	3,690	3,690	3,090	2,590	2,190	1,990	1,890	1,490	1,040

4

Fourth stage extended 11.86 - 15.33m boom length

Working radius	m up to	2.5	3.0	3.5	4.0	4.5	4.92	5.0	6.0	7.0	8.0	8.39	9.0
Outrigger	N mode*	kg	3,390	3,390	3,390	3,390	3,390	3,390	2,790	2,390	2,090	1,890	1,690
Max-extended	P mode*	kg	3,390	3,390	3,390	3,390	3,390	3,390	2,790	2,390	2,090	1,990	1,890

5

Fifth stage extended 15.33 - 18.8m boom length

Outrigger	N mode*	kg	1,290	1,040	890	890	840	740	640	590		
Max-extended	P mode*	kg	1,490	1,190	1,040	1,040	990	840	740	690		

Firth stage extended 15.33 - 18.8m boom length

Working radius		m up to	3.5	4.0	4.5	4.92	5.0	6.0	7.0	8.0	8.39	9.0	10.0
Outrigger	N mode*	kg	2,390	2,390	2,390	2,390	2,390	2,390	1,990	1,690	1,590	1,490	1,290
Max-extended	P mode*	kg	2,390	2,390	2,390	2,390	2,390	2,390	1,990	1,690	1,590	1,490	1,390

Firth stage extended 15.33 - 18.8m boom length

Working radius		m up to	11.0	11.86	12.0	13.0	14.0	15.0	15.33	16.0	17.0	18.0	18.8
Outrigger	N mode*	kg	1,040	890	890	840	740	640	590	590	490	440	340
Max-extended	P mode*	kg	1,190	1,040	1,040	990	840	740	690	690	590	540	440

Product specifications are subject to change without notice or obligation.
The photographs and/or drawings in this document are for illustrative purposes only.

Max. Reach
Below Ground
Level

