



Est. 1983
Celebrating **40 Years**

www.hird.co.uk

URW-095

(0.995t x 3.5m)

UNIC Mini Crane

The URW095 has the advantage of fitting through a standard doorway making it ideally suited for interior applications.

With a number of safety innovations and up to 995Kg lift capacity the URW095 is a great option.



0.995t x 3.5m

Technical Specification

Max. lifting capacity	0.995t x 3.5m
Lifting height	8.80m
Max. working radius	8.41m
Boom length	2.53 - 8.65m
Power source	Diesel, Petrol, LPG Dual or Electric Dual
Weight	1,850kg 1,950kg with electric option, 1,920kg with diesel option 2,090kg with diesel and electric dual option

Features include

- Radio remote control operation
- Configurable outriggers
- Automatic hook stow
- Overwinding alarm
- Will pass through single doorway
- Optional searcher hook



CPCS - A66 Compact Crane A




Northern
01482 227333


Central
01302 341659

Southern
0203 174 0658


Working Envelope

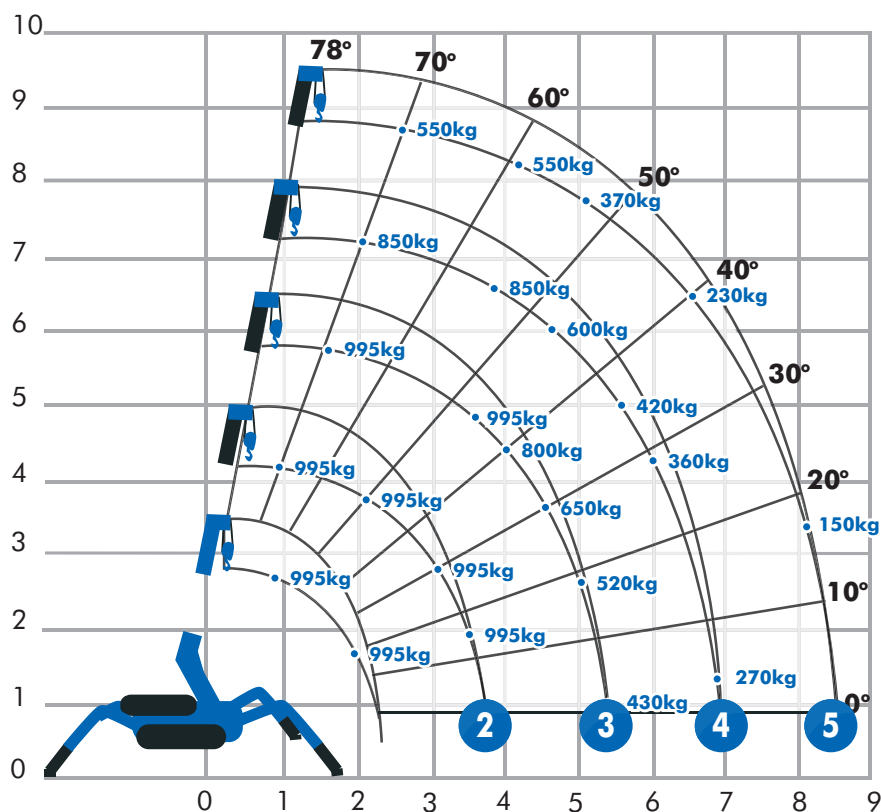




Outrigger Positions

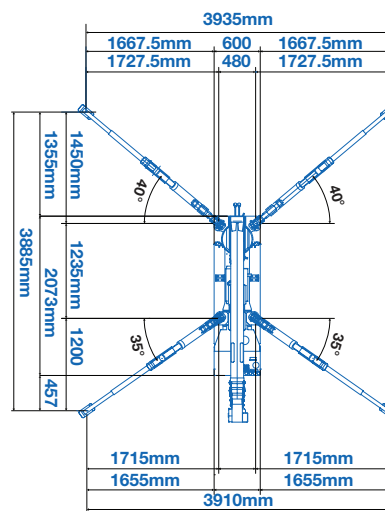

Max. Reach
Below Ground Level

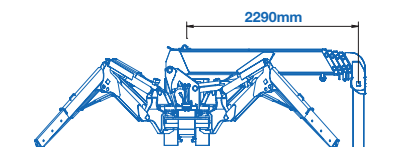

Dimensions (mm)



Rated Loads

2 Second stage extended 2.53 - 4.075m boom length

Working radius		m up to	1.0	1.4	1.5	1.8	2.0	2.5	3.0	3.5	3.835
Outrigger	Max-extended	kg	995	995	995	995	995	995	995	995	900
	Min-extended	kg	995	995	995	995	995	650	490	350	250

3 Third stage extended 4.075 - 5.61m boom length

Working radius		m up to	2.2	2.5	2.9	3.0	3.5	4.0	4.5	5.0	5.37
Outrigger	Max-extended	kg	995	995	995	995	995	800	650	520	430
	Min-extended	kg	800	650	530	500	380	280	220	160	120

4 Fourth stage extended 6.51 - 7.13m boom length

Working radius		m up to	3.3	3.8	4.0	4.5	5.0	5.5	6.0	6.5	6.89
Outrigger	Max-extended	kg	850	850	750	600	500	420	360	320	270
	Min-extended	kg	420	340	300	250	190	140	100	80	60

5 Fifth stage extended 7.13 - 8.65m boom length

Working radius	m up to	3.8	4.1	4.5	5.0	5.5	6.0	6.5	7.0	8.0	8.41	
Outrigger	Max-extended	kg	550	550	450	370	310	270	230	200	150	130
	Min-extended	kg	350	290	250	200	160	130	100	70	40	30

Product specifications are subject to change without notice or obligation.
The photographs and/or drawings in this document are for illustrative purposes only.