


Specifications

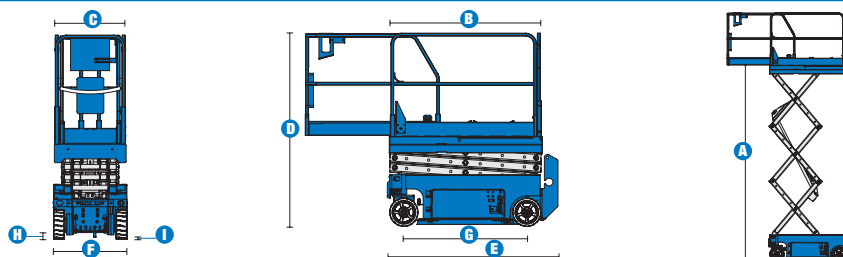

MODELS	GS™-1530		GS™-1532		GS™-1930		GS™-1932	
MEASUREMENTS	Metric	US	Metric	US	Metric	US	Metric	US
Working height maximum*	6.6 m	21 ft	6.6 m	21 ft	7.8 m	25 ft	7.8 m	25 ft
A Platform height maximum	4.6 m	15 ft	4.6 m	15 ft	5.8 m	19 ft	5.8 m	19 ft
B Platform length - outside	1.63 m	5 ft 4 in	1.63 m	5 ft 4 in	1.63 m	5 ft 4 in	1.63 m	5 ft 4 in
extended	2.54 m	8 ft 4 in	2.54 m	8 ft 4 in	2.54 m	8 ft 4 in	2.54 m	8 ft 4 in
Slide-out platform extension deck	91 cm	3 ft	91 cm	3 ft	91 cm	3 ft	91 cm	3 ft
C Platform width - outside	74 cm	2 ft 5 in	74 cm	2 ft 5 in	74 cm	2 ft 5 in	74 cm	2 ft 5 in
Guardrail height	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in	1.10 m	3 ft 7 in
Toeboard height	15 cm	6 in	15 cm	6 in	15 cm	6 in	15 cm	6 in
D Height - stowed: folding guardrails	2.06 m	6 ft 9 in	2.06 m	6 ft 9 in	2.10 m	6 ft 11 in	2.10 m	6 ft 11 in
rails folded	1.72 m	5 ft 8 in	1.72 m	5 ft 8 in	1.75 m	5 ft 9 in	1.75 m	5 ft 9 in
E Length - stowed	1.83 m	6 ft	1.83 m	6 ft	1.83 m	6 ft	1.83 m	6 ft
Length - stowed extended	2.72 m	8 ft 11 in	2.72 m	8 ft 11 in	2.72 m	8 ft 11 in	2.72 m	8 ft 11 in
F Width	76 cm	2 ft 6 in	81.3 cm	2 ft 8 in	76 cm	2 ft 6 in	81.3 cm	2 ft 8 in
G Wheelbase	1.32 m	4 ft 4 in	1.32 m	4 ft 4 in	1.32 m	4 ft 4 in	1.32 m	4 ft 4 in
H Ground clearance - centre	6 cm	2.4 in	6 cm	2.4 in	6 cm	2.4 in	6 cm	2.4 in
I - with pothole guards deployed	2 cm	0.75 in	2 cm	0.75 in	2 cm	0.75 in	2 cm	0.75 in

PRODUCTIVITY								
	2/-		2/1		2/-		2/1	
Max platform occupancy (in/out) ¹								
Lift capacity	272 kg	600 lbs	272 kg	600 lbs	227 kg	500 lbs	227 kg	500 lbs
Drive speed - stowed	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph
Drive speed - raised	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph
Gradeability**	30%	30%	30%	30%	25%	25%	25%	25%
Turning radius - inside	zero	zero	zero	zero	zero	zero	zero	zero
Turning radius - outside	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in	1.55 m	5 ft 1 in
Raise / lower speed	16 / 29 sec	16 / 29 sec	16 / 29 sec	16 / 29 sec	16 / 29 sec	16 / 29 sec	16 / 29 sec	16 / 29 sec
Controls	proportional		proportional		proportional		proportional	
Drive	dual front wheel		dual front wheel		dual front wheel		dual front wheel	
Multiple disc brakes	dual rear wheel		dual rear wheel		dual rear wheel		dual rear wheel	
Tyres - solid non-marking	30x11x20 cm 12x4.5x8 in		30x11x20 cm 12x4.5x8 in		30x11x20 cm 12x4.5x8 in		30x11x20 cm 12x4.5x8 in	

POWER								
Power source	24 V (four 6 V 225 Ah batteries)							
Hydraulic system capacity	14.2 L	3.75 gal	14.2 L	3.75 gal	14.2 L	3.75 gal	14.2 L	3.75 gal

SOUND & VIBRATION LEVELS								
Sound pressure level (ground workstation)	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA
Sound pressure level (platform workstation)	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA	<70 dBA
Vibration	<2.5 m/s ²	<8 ft 2 in/s ²	<2.5 m/s ²	<8 ft 2 in/s ²	<2.5 m/s ²	<8 ft 2 in/s ²	<2.5 m/s ²	<8 ft 2 in/s ²

WEIGHT***								
	1,257 kg	2,771 lbs	1,269 kg	2,797 lbs	1,476 kg	3,254 lbs	1,503 kg	3,313 lbs

STANDARDS COMPLIANCE CE EN280, PB-10-611-03

¹ Indoor use only for the 30' Series

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.

*** Weight will vary depending on options and/or country standards.

Features

STANDARD FEATURES

MEASUREMENTS

GS™-1530 & GS™-1532

- 6.6 m (21 ft) working height
- Up to 272 kg (600 lb) lift capacity

GS™-1930 & GS™-1932

- 7.8 m (25 ft) working height
- Up to 227 kg (500 lb) lift capacity

PRODUCTIVITY

- 1.63 m x 74 cm (64 in x 29 in) steel platform
- Folding rails with half-height swing gate
- 91 cm (3 ft) extension deck
- Dual front wheel drive
- Proportional lift and drive
- Universal 20 amp smart charger
- Rear recessed charger receptacle
- 25% to 30% gradeability
- Platform control with battery charge indicator and diagnostic display
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Manual brake release
- Swing out components trays
- Solid non-marking tyres
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter
- Certified load sensor

POWER

- 24 V DC (four 6 V 225 Ah batteries)



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Air line to platform
- Power to platform (plug, socket and ground fault interrupt earth leakage on request)
- Dual flashing beacons
- Motion alarm
- Platform work lights*
- Automotive-style horn
- Biodegradable oil

*Available aftermarket only