

Specifications

Models	Z-34/22 IC 2WD		Z-34/22 IC 4WD	
Measurements	Metric	US	Metric	US
Working height maximum*	12.52 m	40 ft 6 in	12.62 m	40 ft 10 in
Platform height maximum	10.52 m	34 ft 6 in	10.62 m	34 ft 10 in
Horizontal reach maximum	6.78 m	22 ft 3 in	6.78 m	22 ft 3 in
Up and over clearance maximum	4.57 m	15 ft	4.6 m	15 ft 1 in
A Platform length	0.76 m	2 ft 6 in	0.76 m	2 ft 6 in
B Platform width	1.42 m	4 ft 8 in	1.42 m	4 ft 8 in
C Height - stowed	2.00 m	6 ft 7 in	2.06 m	6 ft 9 in
D Length - stowed	5.64 m	18 ft 6 in	5.66 m	18 ft 7 in
E Storage height	2.26 m	7 ft 5 in	2.29 m	7 ft 6 in
F Storage length	4.08 m	13 ft 5 in	4.11 m	13 ft 6 in
G Width	1.73 m	5 ft 8 in	1.85 m	6 ft 1 in
H Wheelbase	1.88 m	6 ft 2 in	1.88 m	6 ft 2 in
I Ground clearance - center	0.15 m	6 in	0.17 m	6.5 in

Productivity

Lift capacity	227 kg	500 lbs	227 kg	500 lbs
Platform rotation	180°	180°	180°	180°
Vertical jib rotation	139°	139°	139°	139°
Turntable rotation	355° non-continuous		355° non-continuous	
Turntable tailswing	zero	zero	zero	zero
Drive speed - stowed	1.1 km/h	0.68 mph	1.1 km/h	0.68 mph
Drive speed - raised**	30 cm/s	1 ft/s	30 cm/s	1 ft/s
Gradeability - stowed***	37%	37%	45%	45%
Turning radius - inside	1.75 m	5 ft 9 in	1.80 m	5 ft 11 in
Turning radius - outside	4 m	13 ft 1 in	4.11 m	13 ft 6 in
Controls	12V DC	proportional	12V DC	proportional
Tyres - foam filled	23 x 37 cm	9 x 14.5 in	25.4 x 42 cm	10 x 16.5 in rough terrain

Power

Power source	Tier IV Kubota DF-972 3-cylinder gas/LPG 31 hp (23.1 kW) Tier IV Kubota D-1105 3-cylinder diesel 26 hp (19.4 kW) Tier IV Perkins 403 D11 3-cylinder diesel 26.4 hp (19.7 kW)			
Auxiliary power unit	12V DC	12V DC	12V DC	12V DC
Hydraulic tank capacity	71.9 L	19 gal	71.9 L	19 gal
Fuel tank capacity	35.2 L	9 gal	35.2 L	9 gal

Sound & Vibration Levels


Sound pressure level (ground workstation)	<81 dBA	<81 dBA	<81 dBA	<81 dBA
Sound pressure level (platform workstation)	<80 dBA	<80 dBA	<80 dBA	<80 dBA
Vibration	<2.5 m/s ²	<8 ft 2 in/s ²	<2.5 m/s ²	<8 ft 2 in/s ²

Weight****

CE Industrial foam filled tyres	4,793 kg	10,566 lbs	N/A	N/A
CE rough terrain foam filled tyres	4,892 kg	10,786 lbs	4,929 kg	10,986 lbs

Standards Compliance EU Directives: 2006/42/EC - Machinery (harmonized standard EN280:2001+A2:2009); 2004/108/EC (EMC); 2000/14/EC (Outdoor Noise)

Range Of Motion Z-34/22 IC

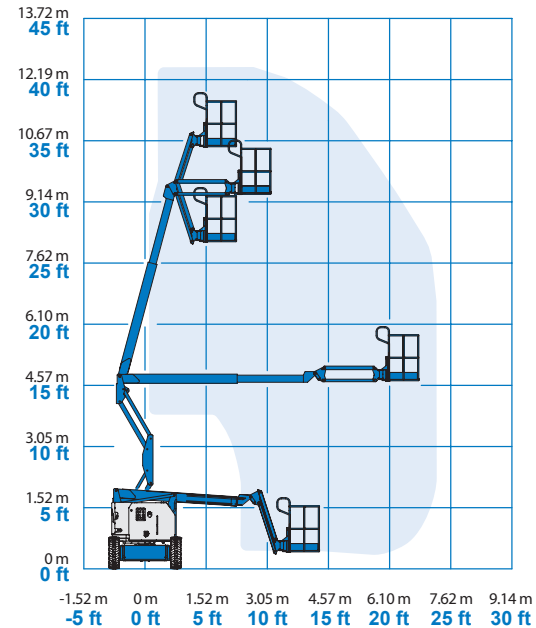


* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** In lift mode (platform raised), the machine is designed to operate on firm, level surfaces only.

*** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

**** Weight will vary depending on options and/or country standards.

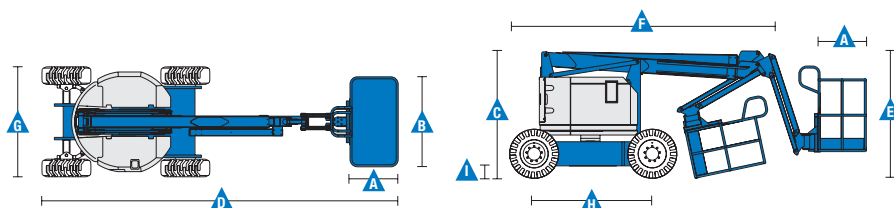

Features

Standard Features

Measurements

Z-34/22 IC 2WD

- 12.52 m (40 ft 6 in) working height
- 6.78 m (22 ft 3 in) horizontal reach
- 4.57 m (15 ft) up and over clearance
- Up to 227 kg (500 lbs) lift capacity

Z-34/22 IC 4WD

- 12.62 m (40 ft 10 in) working height
- 6.78 m (22 ft 3 in) horizontal reach
- 4.57 m (15 ft) up and over clearance
- Up to 227 kg (500 lbs) lift capacity

Productivity

- 1.22 m (4 ft) jib with 139° working range
- Self-levelling platform
- Hydraulic platform rotation
- Fully proportional controls
- Thumb rocker steer
- Drive enable
- AC power cord to platform
- Horn
- Hour meter
- Tilt alarm
- Descent & travel alarm
- Flashing beacon
- 355° non-continuous turntable rotation
- Locking turntable covers
- Zero tailswing and front arm swing
- Two speed wheel motors
- Certified load sensor

Power

- 12 V DC auxiliary power

Easily Configured To Meet Your Needs

Platform Options

- Steel 1.42 m (4 ft 8 in) (standard)

Jib

- Articulating 1.22 m (4 ft) jib boom

Engine Options

- Tier IV Kubota DF-972 3-cylinder gas/LPG 23.1 kW (31 hp)
- Tier IV Kubota D-1105 3-cylinder diesel 19.4 kW (26 hp)
- Tier IV Perkins 403 D11 3-cylinder diesel 19.7 kW (26.4 hp)

Drive Options

- 2WD
- 4WD

Tyre Options

- Industrial foam-filled (standard 2WD)
- Industrial non-marking foam-filled
- Rough terrain foam-filled (standard 4WD)

Options & Accessories

Productivity Options

- Platform swing gate
- Platform top auxiliary rail
- Air line to platform
- Power to platform (incl. plug, socket and ground fault interrupt leakage on request)
- Work lights package (2 on chassis, 2 on platform)
- Aircraft protection kit ^(1,2): platform foam padding and padded disable system
- Hostile environment kit ⁽²⁾: cylinder bellow, boom wiper seals and platform control box cover
- Biodegradable hydraulic oil ⁽²⁾
- Tilt cut-out option
- Track & Trace ⁽³⁾ (Gps unit providing machine location & operating information)
- Lockable platform control box cover
- Tool tray

Power Options

- Diesel muffler with spark arrestor ⁽²⁾ (Perkins only)
- Engine gauge package ⁽²⁾: oil pressure, temperature & voltage
- AC Generator Packages (110 V / 60 Hz - 220 V / 50 Hz, 2200 W) ⁽²⁾
- LPG tank 15.19 kg (33.5 lbs) capacity
- Low temperature cut-out module
- Engine heater option ⁽⁴⁾
- Refinery kit with spark arrestor and electric or mechanical Chalmers valve ⁽⁴⁾



⁽¹⁾ Reduces platform load capacity to 199,6 kg (440 lbs)

⁽²⁾ Factory - fit option only

⁽³⁾ Includes a first 2 years subscription

⁽⁴⁾ Available with Kubota engine only